


Architecture

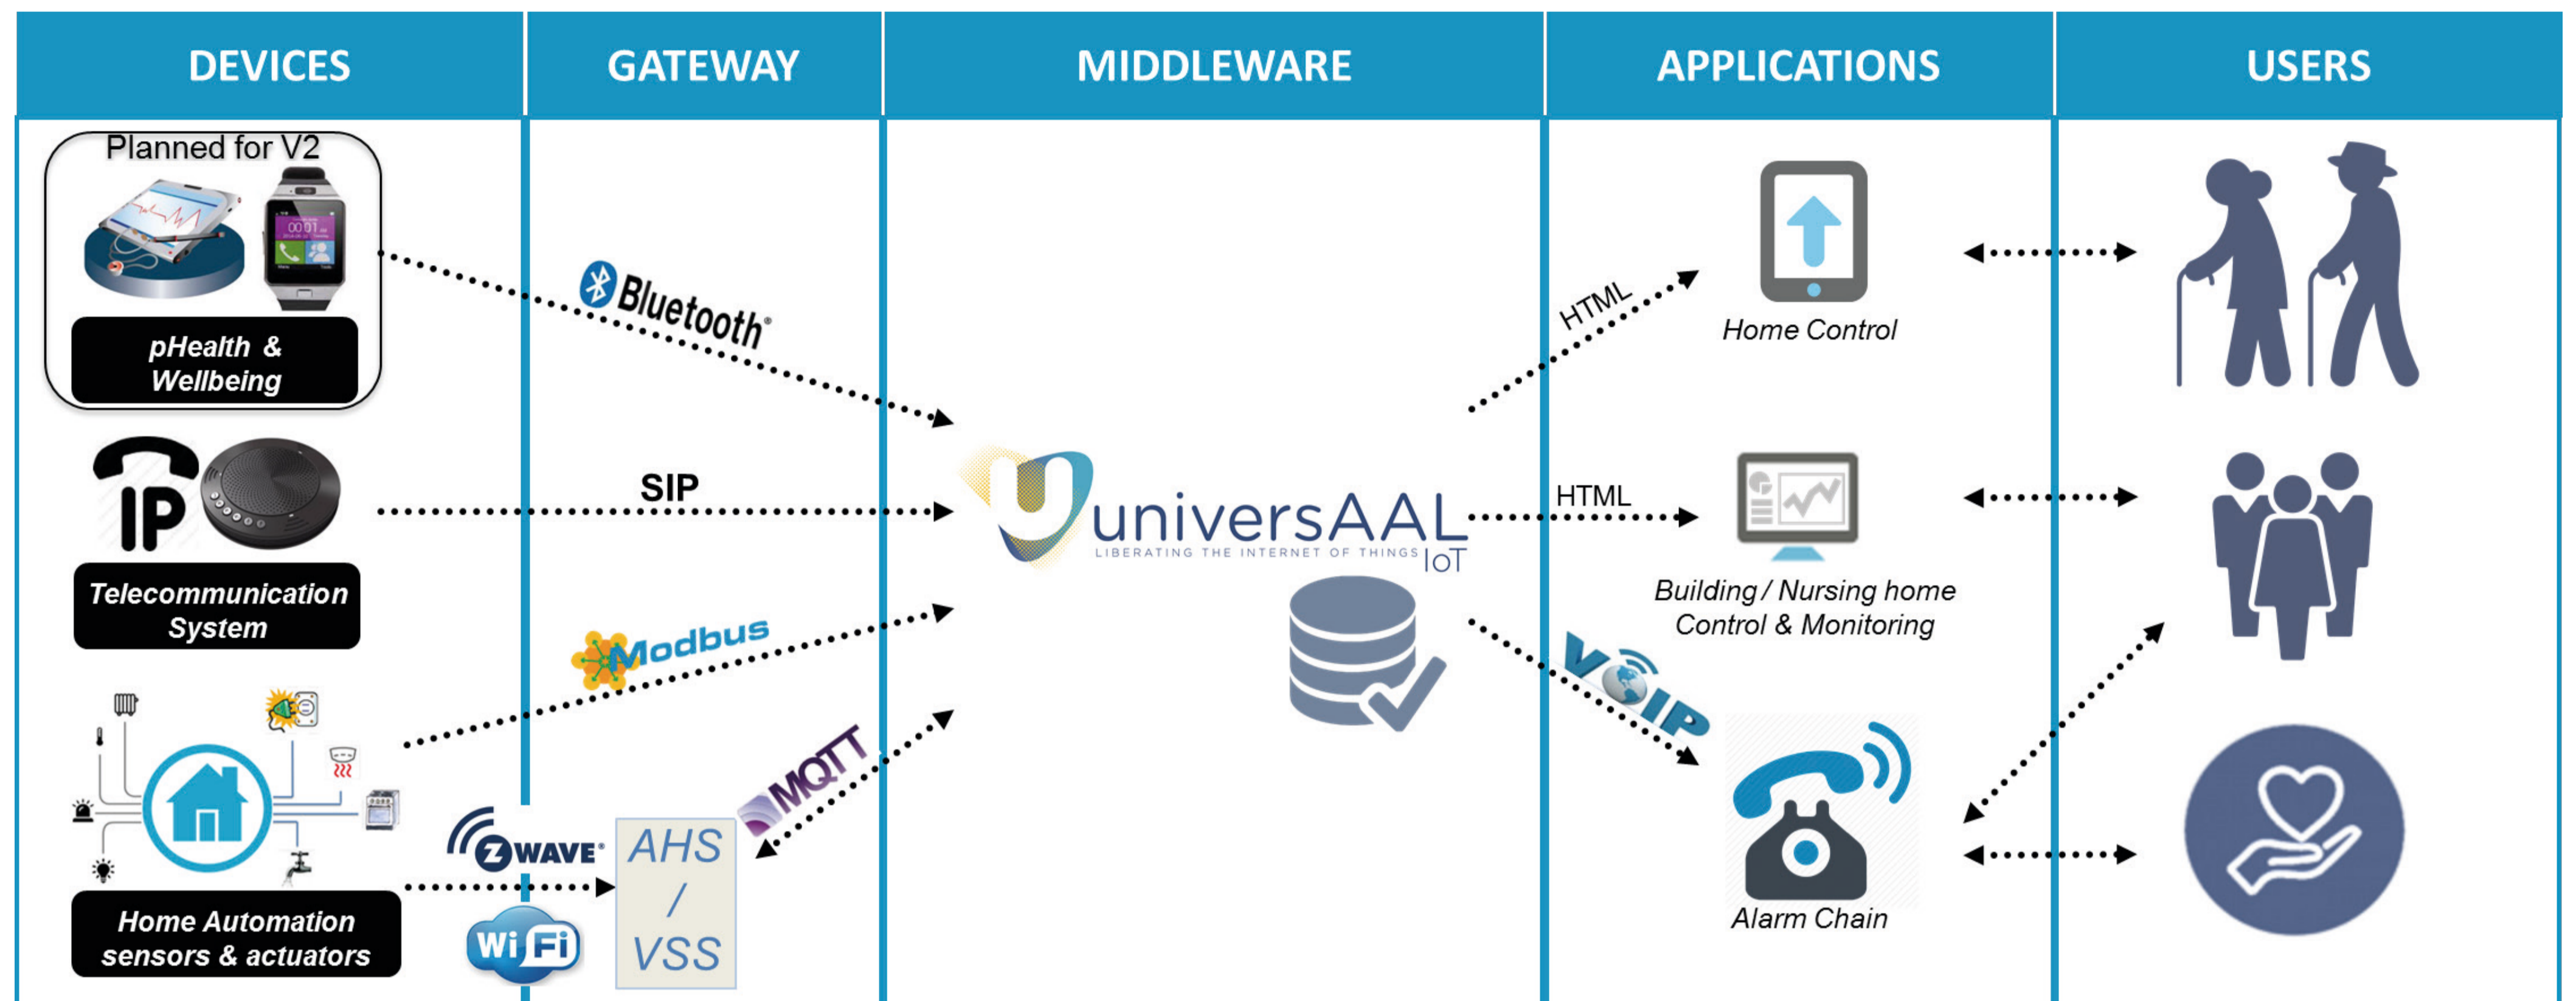

Equipment onsite


- Weiterstadt: 798 of 1043 = 77%
- Treuchtlingen: 16 of 674 = 2%
- Stuttgart: 33 of 545 = 6%
- Rodgau: 832 of 1027 = 81%
- **Total: 1679 devices of 3289 = 51%**

Services & Apps in use

Home control & Alarm chain



Building / Nursing home Control & monitoring

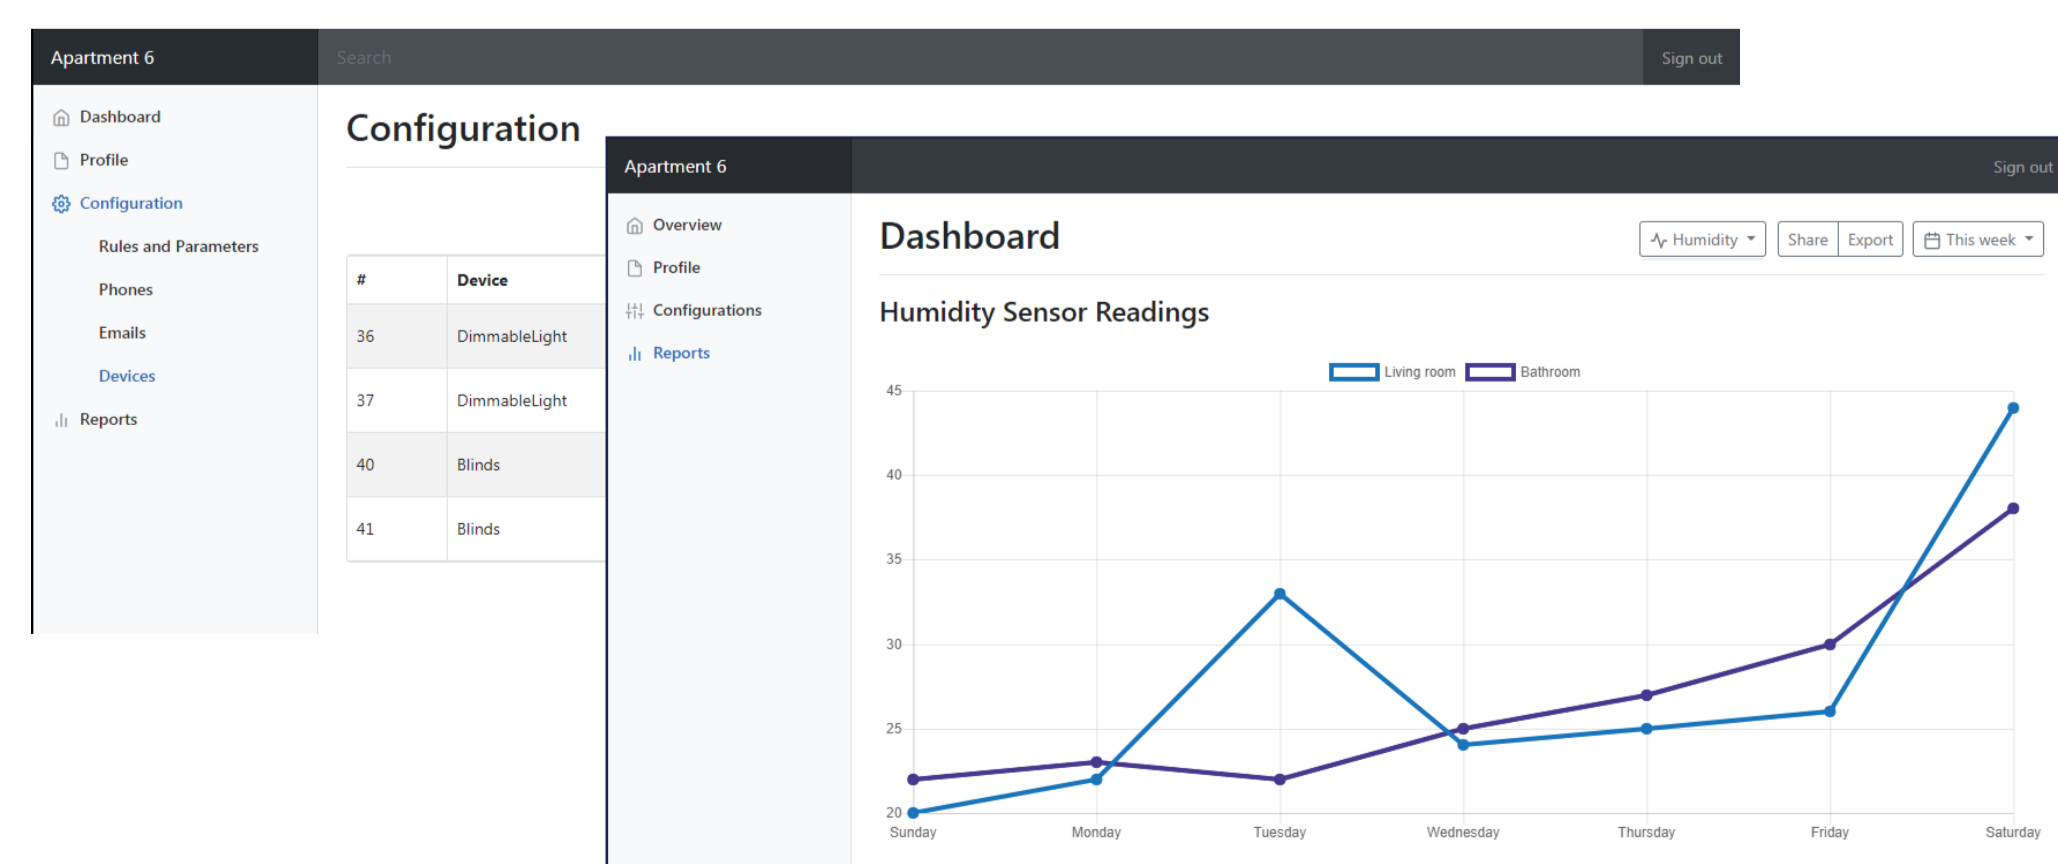

Data collection

- **Emergencies:** unusual long inactivity, no return to bed during night, protracted stay in bathroom & prolonged shower-taking
- **Safety & Comfort:** night light, auto-ventilation depending on air quality, turn off the light in unused rooms, close blinds on long absence
- **Upon leaving:** switch off water / electricity & dangerous appliances, re-activate upon entering
- **Upon smoke alarm:** power off, blinds up & door open

Installation, training & support

Installation

Average time 8 hours. Average number of devices per installation: 14. Total number of installations: 183

Training

No training needed for Weiterstadt & care room inhabitants → 18% of other ca. 145 users already trained

Support

Drop-outs: 0
Total N° incidences so far: 28
Complete resolution of issues within 2 weeks (in average)

